


Customer approval :

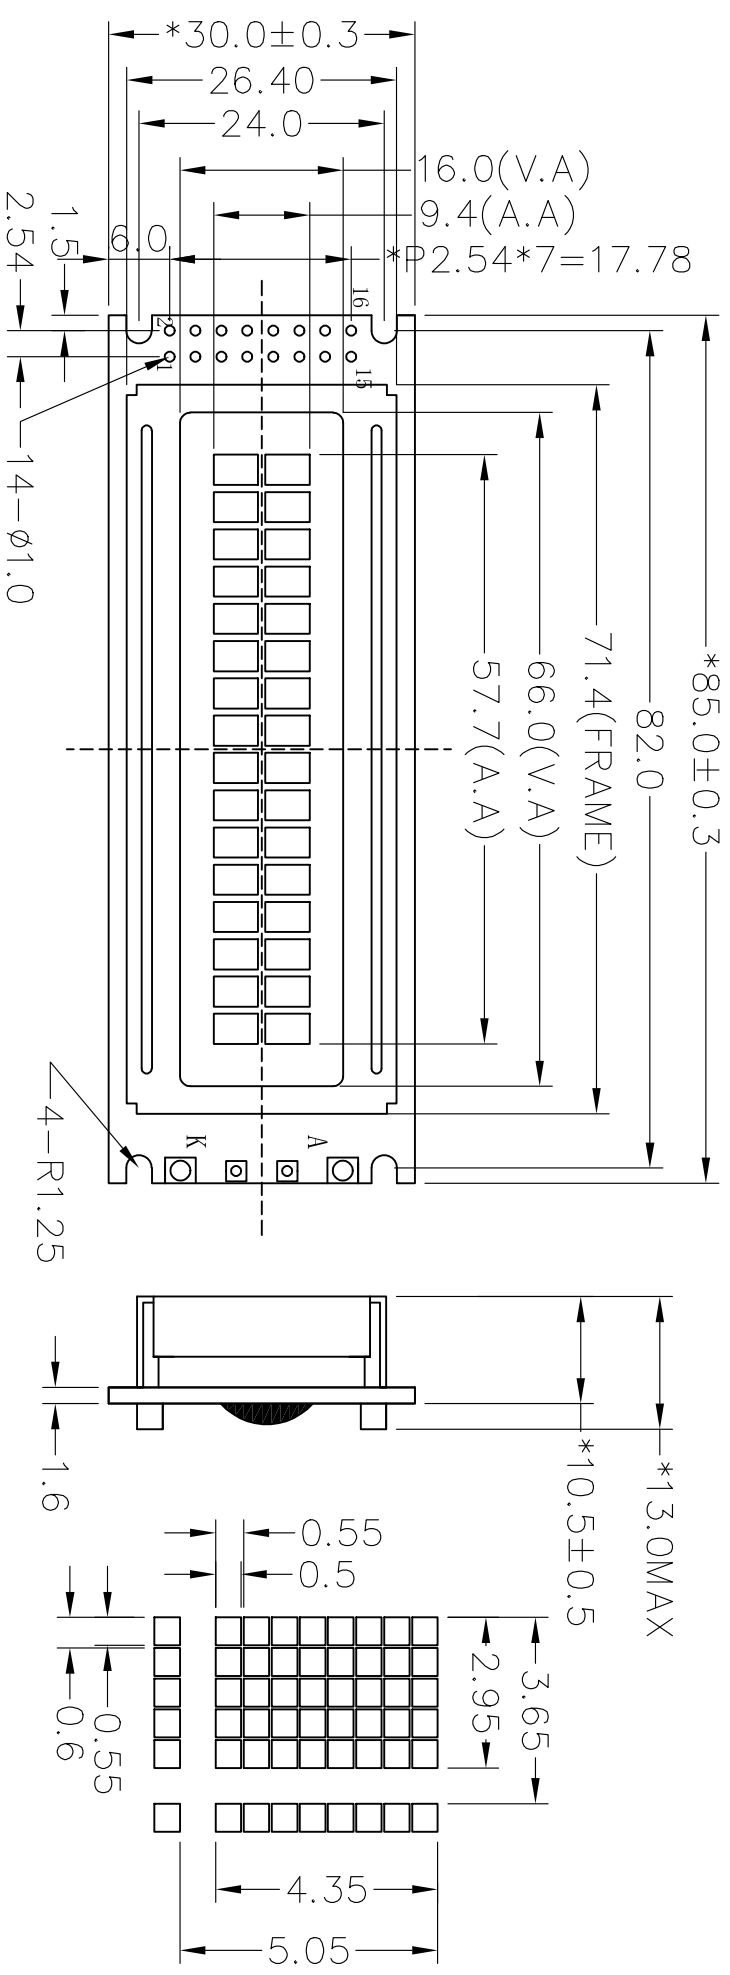

DOT SIZE SCALE 5:1

- SPECIFICATION:
- 1). Driving: Duty:1/16, Bias:1/5, Vdd:5.0V, Vlcd:4.5V
 - 2). VIEWING DIRECTION: 6 O'CLOCK
 - 3). Display mode: STN/Positive/Transflective/YG
 - 4). Operating temp.: -20°C~+70°C
 - 5). Storage temp.: -30°C~+80°C
 - 6). Control IC: SPLC780D1(Or Compatible)
 - 7). BACKLIGHT: Edge,YG
 - 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
 - 9). All the raw materials are RoHS compliant

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VDD	VSS	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK

REVISION RECORD		REV	 深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd		
First issue		A0			
DRAWING NO.		SYB1602DV10-5C10Y1.3N2-B5WG		GENERAL TOL: ± 0.2	
APPROVED BY		CHECKED BY	DRAWING BY		UNIT: mm
				PAGE	
		YJQ 2010/9		1/1	