


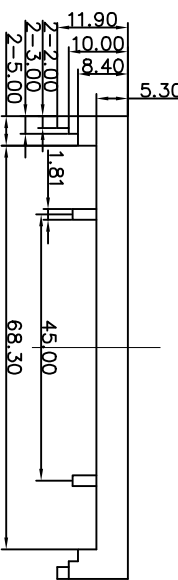
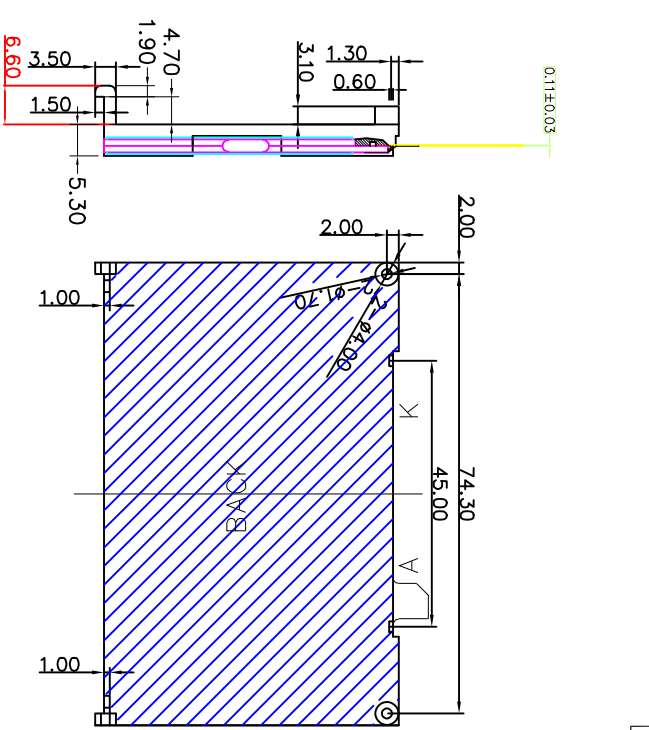



Customer approval :

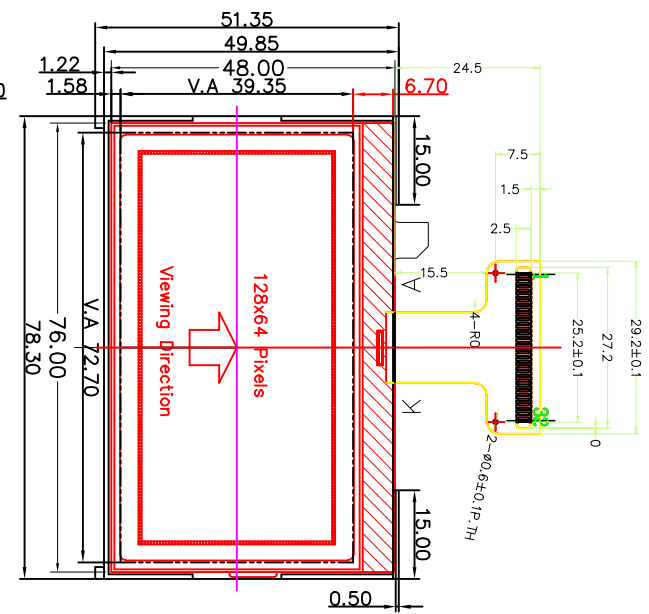

DOTS SIDE SCALE 20:1



COM & SEG LAYOUT



BACKLIGHT CIRCUIT

PIN	SYMBOL
1	/CS1
2	RESET
3	A0
4	WR
5	RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VDD
15	VSS
16	VOUT
17	CAP3P
18	CAP1N
19	CAP1P
20	CAP2P
21	CAP2N
22	CAP4P
23	VR5
24	V4
25	V3
26	V2
27	V1
28	V0
29	VR
30	C86
31	P/S
32	IRS

- NOTES:
1. DISPLAY TYPE: STN/BLUE
  2. VIEWING DIRECTION: 6:00
  3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
  4. LCD CONTROLLER: ST7565R
  5. DRIVE METHOD: 1/65 DUTY BIAS: 1/9
  6. VDD: 3.0V
  7. OPERATING VOL TAGE: 100V
  8. BACKLIGHT: NONE
  9. OPERATING TEMP: -20°C~70°C
  10. STORAGE TEMP: -30°C~80°C
  11. UNMARKED TOLERANCE:±0.3
  12.  MEANS IMPORTANT DIMENSION
  13. ANTI-LUV POLARIZER
  14. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

REV	REVISION RECORD	DATE	MODEL NO.	SYG12864088-3C33G4LN2-B7WC	GENERAL TOL:
A	FIRST ISSUE	2015/11/03			±0.3
B			模组型号		
C			APPROVED BY 审核	Francis	
D			Liu 2015/11/03	Luoxian 2015/11/03	



深圳市三元晶科技有限公司  
ShenZhen TCCLCD HI-Tech Co., Ltd.

