

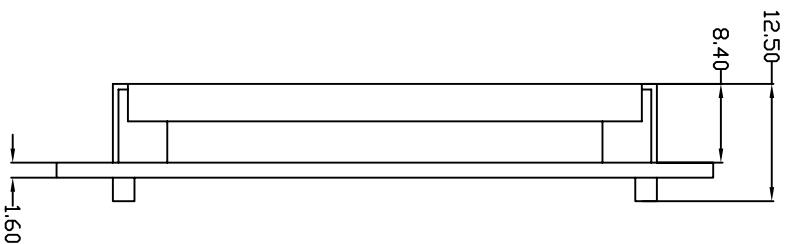


Customer approval :

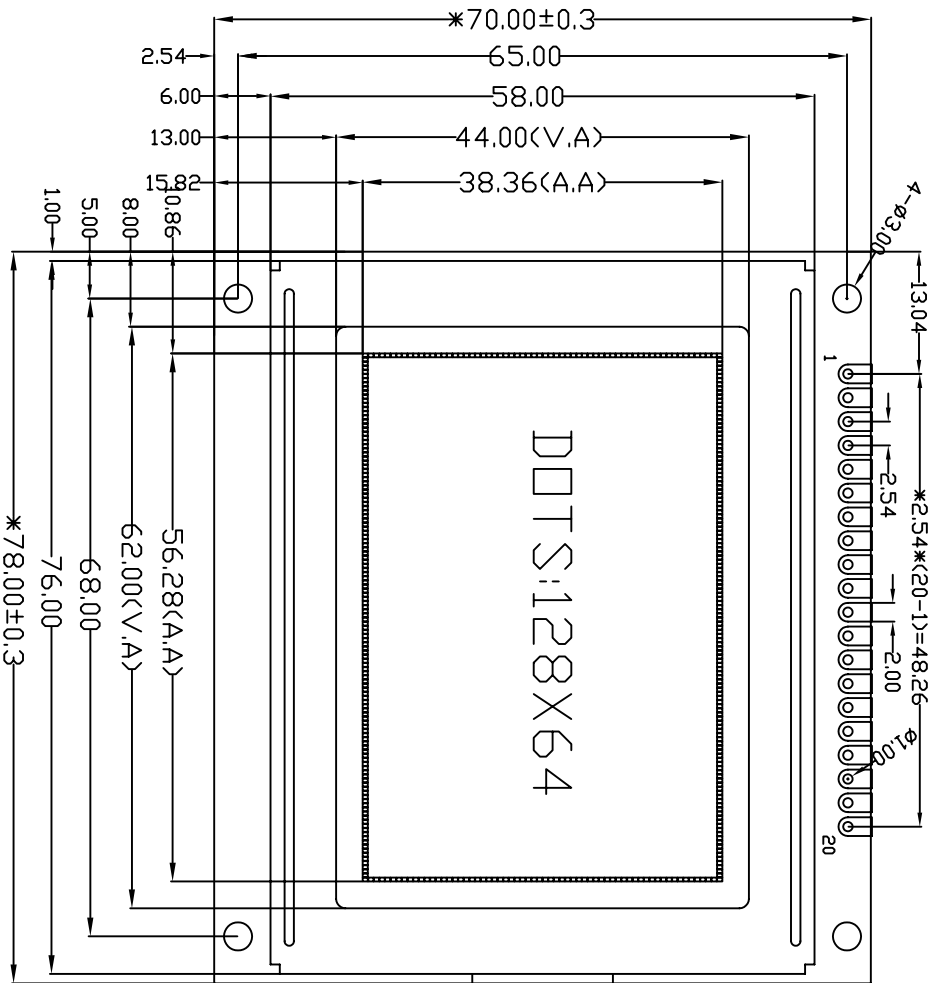

Specification:

- 1). Driving: Dots:128*64,Duty:1/32,Bias:1/6,VDD:5V,VOUT:-4.9V,VO:-4.2V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN,POSITIVE(Y/G),TRANSFLECTIVE
- 4). Operating temp.: -20°C~+70°C

Storage temp.: -30°C~+80°C

- 5). Controller IC:T6963C
- 6). Backlight: Bottom ,White
- 7). Dimensions with mark "(V)" are important,
with mark "(A)" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10
CONNECTION	FG	VSS	VDD	VO	RW	RD	CE	CO	RST	DB0
PIN	11	12	13	14	15	16	17	18	19	20
CONNECTION	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	BLK	BLA

REV	REVISION RECORD	DATE
A0	First issue	02/27



深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd

MODEL NO.
模组型号

SYM12864B1V10

GENERAL TOL: ±0.3

APPROVED BY

CHECKED BY

DRAWING BY

PAGE: 1 OF 1
UNIT: mm

PROJECTION
三角法

