


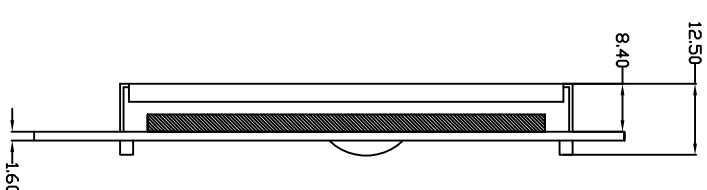


Customer approval :

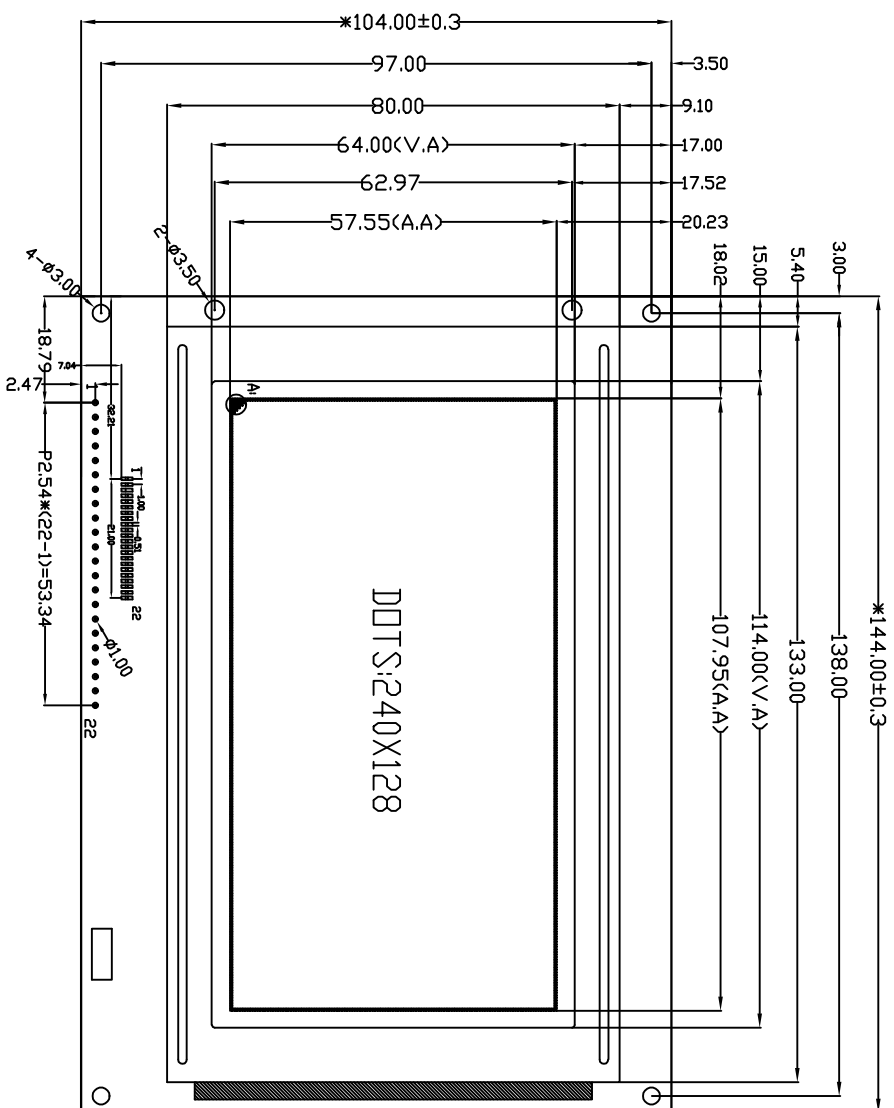

PIN	1	2	3	4	5	6	7	8	9	10	11	12
CONNECTION	FG	GND	VDD	VO	WR	RD	CE	C/D	RES	DB0	DB1	DB2
PIN	13	14	15	16	17	18	19	20	21	22		
CONNECTION	DB3	DB4	DB5	DB6	DB7	FS	VOUT	BLA	BLK	NC		

**SPECIFICATION:**

- 1). Driving: Dots:240\*128, DUTY:1/128, BIAS:1/12, VDD:5.0V, VOUT: -14.5V, VO: -12.4V
- 2). Viewing angle: 6 0'CLOCK
- 3). Display mode:STN/BLUE/Y-G/TRANSMISSIVE/NEGATIVE;FSTN
- 4). Operating temp: -20°C~+70°C  
Storage temp: -30°C~+80°C
- 5). Controller IC: T6963(Or Compatible)
- 6). Backlight: White
- 7). Dimensions with mark "\*" are important, with mark "(" )" are referenced
- 8). All the raw materials are RoHS compliant

**REVISION RECORD**

First issue

REV  
AO


DRAWING NO.  
SYM240128A2V22

深圳市三元晶科技有限公司  
Shenzhen TCC LCD Hi-Tech Co., Ltd.

GENERAL TOL: ± 0.3

APPROVED BY: DRAWING BY: UNIT: mm PAGE

LAN  
2010/01



1/1

