Customer approval :

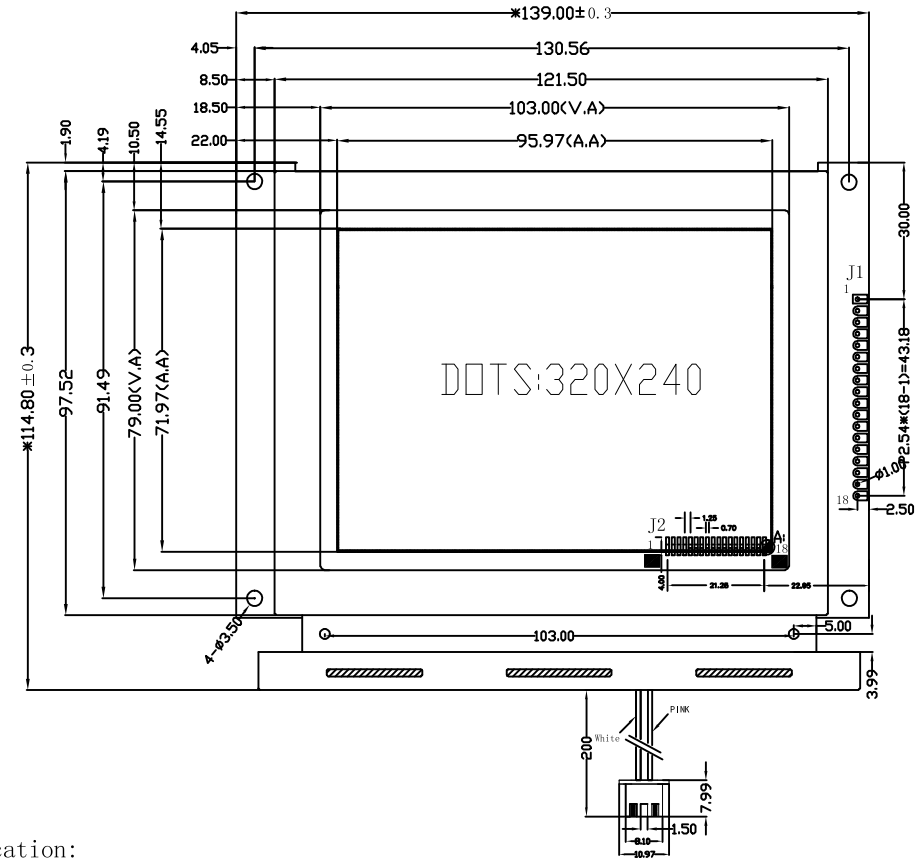

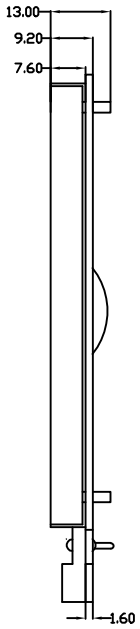





接口选择使用，FPC选择使用

RA8835: J2:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
CONNECTION	GND	VDD	VO	A0	WR	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	/CS	/RST	VOUT	SEL1

RA8835: J1:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
CONNECTION	GND	VDD	VO	WR	RD	/CS	A0	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	VOUT

NO Controller: J1:

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	DMF50081接口
CONNECTION	FLM	LP	CP	M	VO	VDD	GND	VOUT	D0	D1	D2	D3	DISP	FG	

Specification:

1). Driving: Dots:320*240, Duty:1/240, Bias:1/16,VDD:5V,VOUT:-19.5V,VO:-13.5V
2). Viewing Direction: 6 O'clock
3). Display mode:STN Bule or FSTN/Transflective/Positive
4). Operating temp.: -20° C~+70° C
Storage temp.: -30° C~+80° C
5). Controller IC: RA8835AP3N or No Controller
6). Backlight: White CCFL
7). Dimensions with mark "*" are important,
with mark "()" are referenced
8). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE
A0	First issue	04/09

TCC® 深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co,. Ltd

MODEL NO.	SYM320240CV20		GENERAL TOL:	± 0.3
APPROVED BY	CHECKED BY	DRAWING BY	PAGE? 1 OF 1	UNIT: mm
			PROJECTION	