Customer approval :

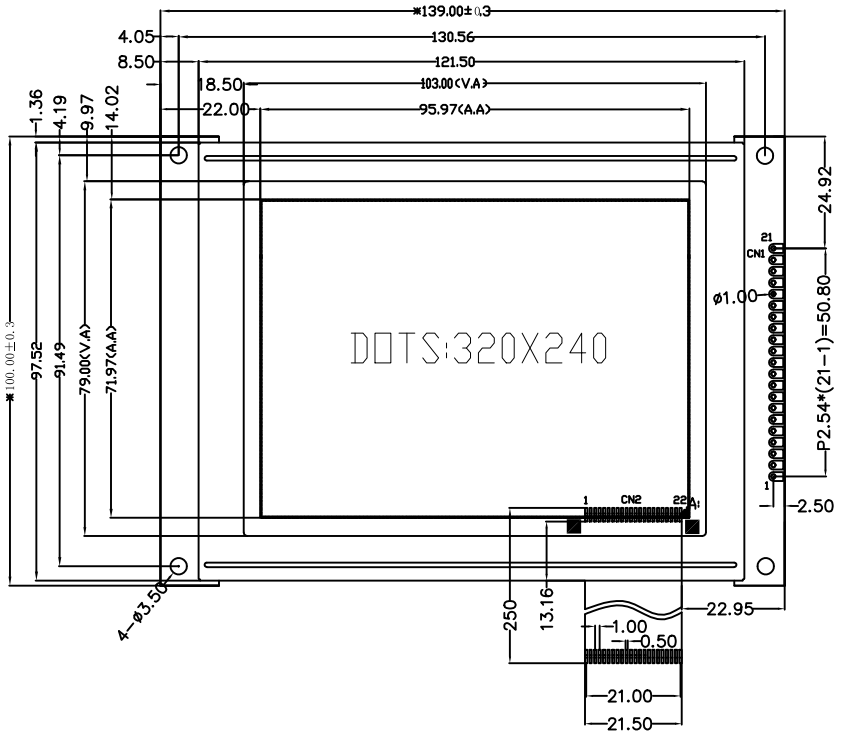

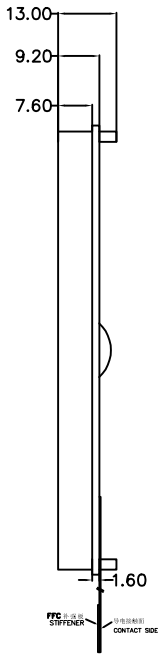





SPECIFICATION:
Driving: Duty:1/240, Bias:1/16,VOUT:-19.5V,V0:-13.5V,VDD:5V
VIEWING DIRECTION: 6 O'CLOCK
Display mode: STN/Negative/Transmissive/Blue
Operating temp.:-20° C~+70° C
Storage temp.: -30° C~+80° C
Control IC: RA8806 or RA8803
BACKLIGHT Type: White
DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
All the raw materials are RoHS compliant

接口选择使用，FPC选择使用

CN1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	GND	VCC	VO	WR	RD	/CS	AO	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	INT	BUSY	BLK

CN2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
	GND	VCC	VO	WR	RD	/CS	AO	/RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	INT	BUSY	BLK	NC

REV	REVISION RECORD	DATE
A0	First issue	04/10

TCC® 深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO. 模组型号	SYM320240CZKV20	GENERAL TOL: 未注公差 ± 0.3
APPROVED BY	CHECKED BY	DRAWING BY
		LAN

PAGE: 1 OF 1 页面 | UNIT: mm 单位 | PROJECTION 三角法