Customer approval :

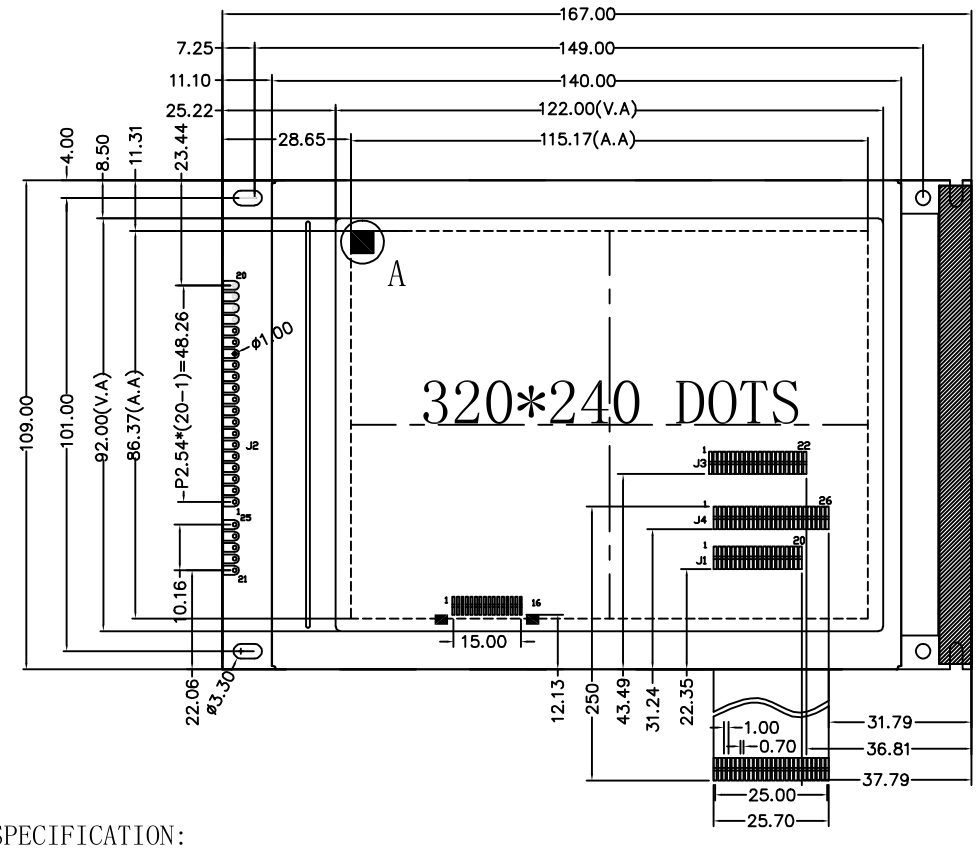

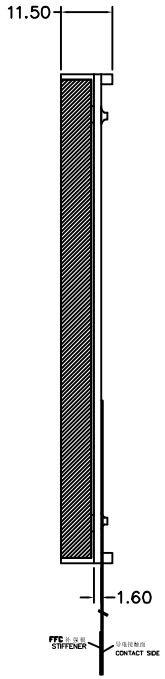





SPECIFICATION:

1). Driving: Duty:1/240, Bias:1/17,VOUT:28.90V,V0:21.40V,VDD:5V
2). VIEWING DIRECTION: 6 O'CLOCK
3). Display mode: STN/Negative/Transmissive/Blue
4). Operating temp.:-20° C~+70° C
Storage temp.: -30° C~+80° C
5). Control IC: RA8806\S1D13700
6). BACKLIGHT Type: White 5V 90ma
7). DIMENSIONS WITH MARK "*" ARE IMPORTANT
WITH MARK "()" ARE REFERENCED
8). All the raw materials are RoHS compliant

接口选择使用，FPC选择使用

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
J4	VSS	VDD	VO	AO	R/W	RD	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	CS	RST	VOUT	BLA	DCLK	T_CS	DIN	DOUT	PEN	BUSY	IN3	IN4
J3	RST	RD	R/W	CS	AO	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VCC	VSS	VOUT	VO	DCLK	DOUT	DIN	T_CS	PEN	NC	NC		
J1	VSS	VDD	VO	R/W	RD	CS	AO	RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	VOUT	BLA	INT	BUSY	NC	NC				
J2	VSS	VDD	VO	R/W	RD	CS	AO	RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	VOUT	BLA	BLK	DCLK	T_CS	DIN	DOUT	PEN	

REV	REVISION RECORD	DATE
A0	First issue	05/15

深圳市三元晶科技有限公司
ShenZhen TCC LCD Hi-Tech Co., Ltd.

MODEL NO.	SYT320240B4V30		GENERAL TOL: 未注公差 ± 0.3
APPROVED BY	CHECKED BY	DRAWING BY	PAGE: 1 OF 1 页面 / UNIT: mm 单位
		LAN	PROJECTION 三角法